

# 35 YEAR MASTER FLASH®

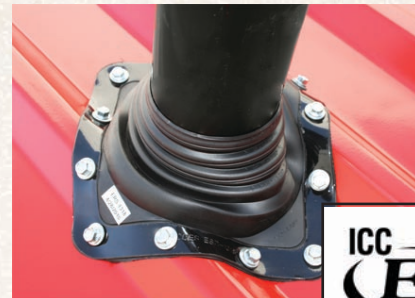


## “NEW ICC LISTED FLASHING”

The only ICC listed flashing for the Metal Building Industry with a **35 year warranty**

ISO Quality, Price & Availability

ADVANCED OZONE RESISTANCE tested to...	EPDM 70 hour @ 500 pphm
HIGH TEMPERATURE RESISTANCE Tested to	Intermittent +135°C (+275°F) Continuous +100°C (+212°F)
LOW TEMPERATURE RESISTANCE tested to...	-55°C (-67°F)
COMPRESSION SET minimum...	25%



\*Complete specification data and testing methods are available upon request.

- 11 Sizes
- Made of EPDM, this flashing is designed for maximum resistance to all weather conditions.
- The base is designed to fit virtually all panel configurations and roof pitches regardless of pipe location.
- On-site customization.
- Ozone and UV protected.
- Designed for 1/8" to 28-1/2" (1.6 to 724 mm) diameter pipes.
- Pipe diameters can be seen clearly for proper pipe fitting.
- Flexibility absorbs vibration and pipe movement.



**IF YOUR FLASHING DOESN'T HAVE A 35 YEAR WARRANTY,  
NEITHER DOES YOUR ROOF.**



## 35 Year Master Flash®



Compliance with the following codes:

**2006 International Building Code® (IBC) • 2006 International Residential Code® (IRC)**

ICC-ES is the United States' leading source of technical information on building products and building technology for code compliance. ICC-ES performs technical evaluations of building products, components, methods and materials. The evaluation process culminates with the issuance of reports on compliance with the major U.S. building codes, which are available at [www.icc-es.org](http://www.icc-es.org).

ICC-ES is a subsidiary of the International Code Council, a membership association dedicated to building safety and fire prevention that develops the codes used to construct residential and commercial buildings, including homes and schools. Most U.S. cities, counties and states that adopt codes choose the International Codes developed by the International Code Council.



Master Flash® was used to create a new engineering standard for profiled roofing by the International Association of Plumbing and Mechanical Officials (for the Uniform Plumbing Code) and remains the first product listed. These products are also listed for use with Type B vents.

**To see our complete product line go to [www.aztecwasher.com](http://www.aztecwasher.com)**













13821 Danielson Street, Poway, CA 92064 • 1-800-WASHER 5 (927-4375) • Ph: 858-513-4350 • Fax: 858-513-4305

# NEW 35 YEAR MASTER FLASH®

**35**  
YEAR  
WARRANTY

## SIZING CHART

Check diameter of pipe. Select the appropriate 35 Year Master Flash® for pipe or duct diameter. Only use maximum pipe diameters on minimal roof angles. For extreme pitch or surface irregularity select next larger size. Then refer to the part number for the 35 Year Master Flash® desired.

	Pipe Size	Compound	Part No.		Flashing Details	
<b>Mini</b>	1/8" - 3/4" (3.2 mm - 19.1 mm)	Black EPDM	ICC-SQ051B		A-Top opening diameter	Closed
					B-Cut to suit pipe size	1/8" - 3/4" (3.2-19.1 mm)
					C-Base dimensions	2 - 1/4" (57.2 mm)
<b>#1</b>	1/4" - 2-3/4" (6.4 - 70 mm)	Black EPDM	ICC-SQ101B		A-Top opening diameter	Closed
					B-Cut to suit pipe size	1/4" - 2-3/4" (6.4 - 70 mm)
					C-Base dimensions	4-1/2" (114 mm)
<b>#2</b>	7/8" - 4" (22 - 101.6 mm)	Black EPDM	ICC-SQ201B		A-Top opening diameter	7/8" (22 mm)
					B-Cut to suit pipe size	7/8" - 4" (22 - 101.6 mm)
					C-Base dimensions	6" (152.4 mm)
<b>#3</b>	1/4" - 5-3/4" (6.4 - 146 mm)	Black EPDM	ICC-SQ301B		A-Top opening diameter	Closed
					B-Cut to suit pipe size	1/4" - 5-3/4" (6.4 - 146 mm)
					C-Base dimensions	8" (203.2 mm)
<b>#4</b>	2-3/4" - 7" (70 - 177.8 mm)	Black EPDM	ICC-SQ401B		A-Top opening diameter	2-3/4" (70 mm)
					B-Cut to suit pipe size	2-3/4" - 7" (70 - 177.8 mm)
					C-Base dimensions	10" (254 mm)
<b>#5</b>	4" - 8-1/4" (101.6 - 209.5 mm)	Black EPDM	ICC-SQ501B		A-Top opening diameter	4" (101.6 mm)
					B-Cut to suit pipe size	4" - 8-1/4" (101.6 - 209.5 mm)
					C-Base dimensions	11" (279.4 mm)
<b>#6</b>	4-3/4" - 10" (121 - 254 mm)	Black EPDM	ICC-SQ601B		A-Top opening diameter	4-3/4" (121 mm)
					B-Cut to suit pipe size	4-3/4" - 10" (121 - 254 mm)
					C-Base dimensions	12" (304.8 mm)
<b>#7</b>	5-1/2" - 11-1/2" (140 - 292 mm)	Black EPDM	ICC-SQ701B		A-Top opening diameter	5-1/2" (140 mm)
					B-Cut to suit pipe size	5-1/2" - 11-1/2" (140 - 292 mm)
					C-Base dimensions	14" (355.6 mm)
<b>#8</b>	6-3/4" - 13-1/2" (171.4 - 343 mm)	Black EPDM	ICC-SQ801B		A-Top opening diameter	6-3/4" (171.4 mm)
					B-Cut to suit pipe size	6-3/4" - 13-1/2" (171.4 - 343 mm)
					C-Base dimensions	17" (431.8 mm)
<b>#9</b>	9-1/2" - 20-1/2" (241 - 520 mm)	Black EPDM	35W-SQ901B		A-Top opening diameter	9-1/2" (241 mm)
					B-Cut to suit pipe size	9-1/2" - 20-1/2" (241 - 520 mm)
					C-Base dimensions	25" (635 mm)
<b>Maxi</b>	12" - 28-1/2" (305 - 724 mm)	Black EPDM	35W-SQ951B		A-Top opening diameter	12" (304 mm)
					B-Cut to suit pipe size	12" - 28-1/2" (304 - 724 mm)
					C-Base dimensions	34" (863.6 mm)