

ELECTRICAL MAST CONNECTION MASTER FLASH®

**20
YEAR
WARRANTY**

Specifically designed for the Residential Roofing Industry,

ISO Quality, Price & Availability

ADVANCED OZONE RESISTANCE tested to...	EPDM 70 hour @ 500 pphm
HIGH TEMPERATURE RESISTANCE Tested to	Intermittent Continuous
	+135°C (+275°F) +100°C (+212°F)
LOW TEMPERATURE RESISTANCE tested to...	- 55°C (-67°F)
COMPRESSION SET minimum...	25%

*Complete specification data and testing methods are available upon request.



Weather Protection Made of E.P.D.M. ,

these flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.



Modification Made Simple

Easy to see pipe diameters make for painless on-site installation.




Adaptable Base

The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.



The built in 20° pitch allows adaptability to almost any roof pitch including 45°

- No hassle stainless steel gripper to secure retrofit application

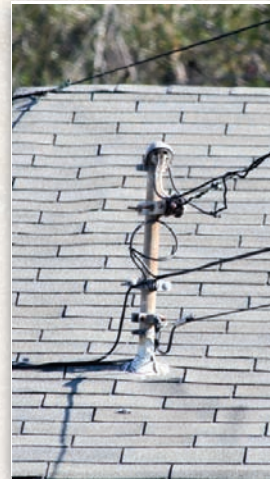

From this



To this



Another solution for
your installation needs
Aztec does it again!



Pipe Size	Compound	Part No.		Flashing Details	
Electrical Mast Connection 0" - 5-3/8" (0 - 136mm)	Black EPDM	EMC101BS		A-Top opening diameter	Closed
				B-Cut to suit pipe size	0" - 5-3/8" (0 - 136mm)
				C-Base dimensions	15" (381mm)

To see our complete product line go to www.aztecwasher.com

