

MASTER-CAP MASTER FLASH®

**20
YEAR
WARRANTY**


STANDING SEAM ROOF END CAP FLASHING

ISO Quality, Price & Availability / TWO COMPOUNDS

ADVANCED OZONE RESISTANCE tested to...	EPDM 70 hour @ 500 pphm	SILICONE 70 hour @ 500 pphm
HIGH TEMPERATURE RESISTANCE Tested to		
Intermittent	+135°C (+275°F)	+260°C (+500°F)
Continuous	+100°C (+212°F)	+225°C (+437°F)
LOW TEMPERATURE RESISTANCE tested to...	-55°C (-67°F)	-74°C (-101°F)
COMPRESSION SET minimum...	25%	50%

ALL NEW

*Complete specification data and testing methods are available upon request.

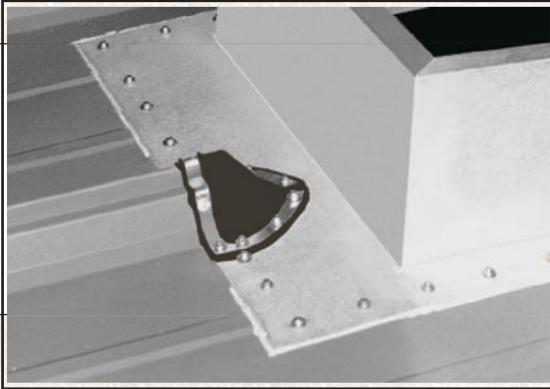

APPLICATIONS:

- Skylights
- Metal Curbs
- Ridge Applications
- Job site Retrofit


Flexibility

- Flexible width allows for most panel configurations
- Expansion feature accommodates all 3" seam heights

Base Features

- Allows side wall of end cap to form on roof panels
- 3" Base allows application at both terminating points of the sheeting or roofing material
- Made of E.P.D.M., these flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light

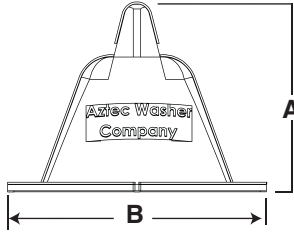

	Compound	Part No.		Flashing Details			
MASTER-CAP	Black EPDM	MC101BA		<table border="1"> <tr> <td>A-Overall Height</td> <td>3-1/4" (82 mm)</td> </tr> <tr> <td>B-Base Dimensions</td> <td>3" (76.2 mm)</td> </tr> </table>	A-Overall Height	3-1/4" (82 mm)	B-Base Dimensions
A-Overall Height	3-1/4" (82 mm)						
B-Base Dimensions	3" (76.2 mm)						

To see our complete product line go to www.aztecwasher.com



13821 Danielson Street, Poway, CA 92064 • 1-800-WASHER 5 (927-4375) • Ph: 858-513-4350 • Fax: 858-513-4305