

MULTI-PORT MASTER FLASH®

**20
YEAR
WARRANTY**


Two Applications • One Design • Multiple Functions

ISO Quality, Price & Availability / TWO COMPOUNDS

ADVANCED OZONE RESISTANCE tested to...	EPDM 70 hour @ 500 pphm	SILICONE 70 hour @ 500 pphm
HIGH TEMPERATURE RESISTANCE		
Tested to Intermittent	+135°C (+275°F)	+260°C (+500°F)
Continuous	+100°C (+212°F)	+225°C (+437°F)
LOW TEMPERATURE RESISTANCE tested to...	-55°C (-67°F)	-74°C (-101°F)
COMPRESSION SET minimum...	25%	50%

*Complete specification data and testing methods are available upon request.

- Accommodates FOUR 1/4" (6mm) or 3/8" (0.9525mm) lines and 1 pipe 1/4" - 2-3/4" - (6mm - 70mm)

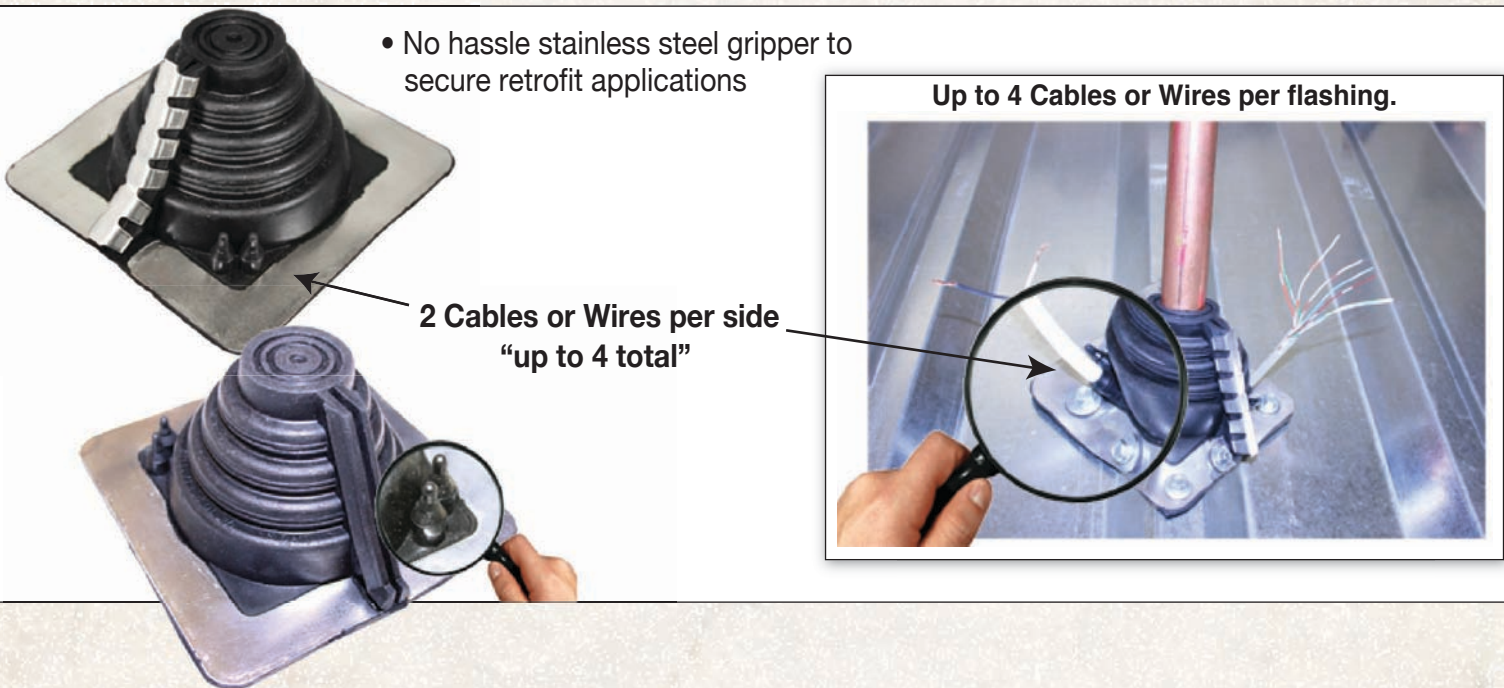

	Pipe Range	Compound	Part No.		Flashing Details	
Multi-Port	STANDARD 1/4"-2-3/4" (6 - 70mm)	Black EPDM	MP101BA		A-Top Opening Diameter	Closed
	RETROFIT 1-1/4"-2-1/4" (25 - 57mm)	Silicone	MP102RA	B-Overall Height	2-1/4" (57.15 mm)	
				C-Base Diameter	4-1/2" (114mm)	

To see our complete product line go to www.aztecwasher.com

