

SOLAR-MULTI-PORT-MR MASTER FLASH®



5 Port Design for the Metal Roofing Industry One Design • Multiple Functions

ISO Quality, Price & Availability / TWO COMPOUNDS

ADVANCED OZONE RESISTANCE tested to...	EPDM 70 hour @ 500 pphm	SILICONE 70 hour @ 500 pphm
HIGH TEMPERATURE RESISTANCE Tested to		
Intermittent	+135°C (+275°F)	+260°C (+500°F)
Continuous	+100°C (+212°F)	+225°C (+437°F)
LOW TEMPERATURE RESISTANCE tested to...	- 55°C (-67°F)	-74°C (-101°F)
COMPRESSION SET minimum...	25%	50%

*Complete specification data and testing methods are available upon request.



• Accommodates:

ONE 0" - 1-15/16" - (0 - 49mm) Pipe


TWO 3/8" (0.9525mm) pipe / cable

TWO 3/4" (20mm) pipe / cable

- 4-1/2" (114mm) Base
- Up to 4 Cables or Wires per flashing
- Extra ports to accommodate Copper pipe and electrical cabling
- Easy install for Solar applications

Weather Protection

Made of EPDM or Silicone, these flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.

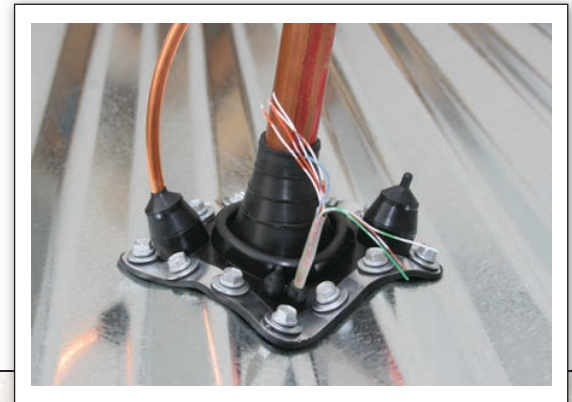

Pipe Range	Compound	Part No.		Flashing Details	
Solar Multi-Port MR • One center port 0" - 1-15/16" (0 - 49mm) Pipe • Two ports up to 3/8" (0.9525mm) pipe / cable • Two ports up to 3/4" (20mm) pipe / cable	Black EPDM	SMP-MR101BA		A-Top Opening Diameter	0" - 1-15/16" (0 - 49mm)
	Silicone	SMP-MR102RA	B-Overall Height	2-1/2" (63.5mm)	
	* Other colors are available		C-Base Diameter	4-1/2" (114mm)	

To see our complete product line go to www.aztecwasher.com

