

High Temperature Universal Master Flash®

Designed for the **Metal Roofing Industry**

Advanced Ozone Resistance tested to...		HIGH TEMP RED • BLACK • GRAY SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent	+260°C (+500°F)
	Continuous	+225°C (+437°F)
Low Temperature Resistance tested to...		- 74°C (-101°F)
Compression Set Maximum...		50%


*Complete specification data and testing methods are available upon request.

10 sizes • 3 High Temp Colors Red, Black and Gray


All Around Design Excellence

This universal flashing has been designed to fit virtually all panel configurations for BTU wood burning fireplace and wood burning stoves.

Made of High Temp Silicone, These flashings are compounded specifically for maximum resistance to weathering due too zone and ultraviolet light.

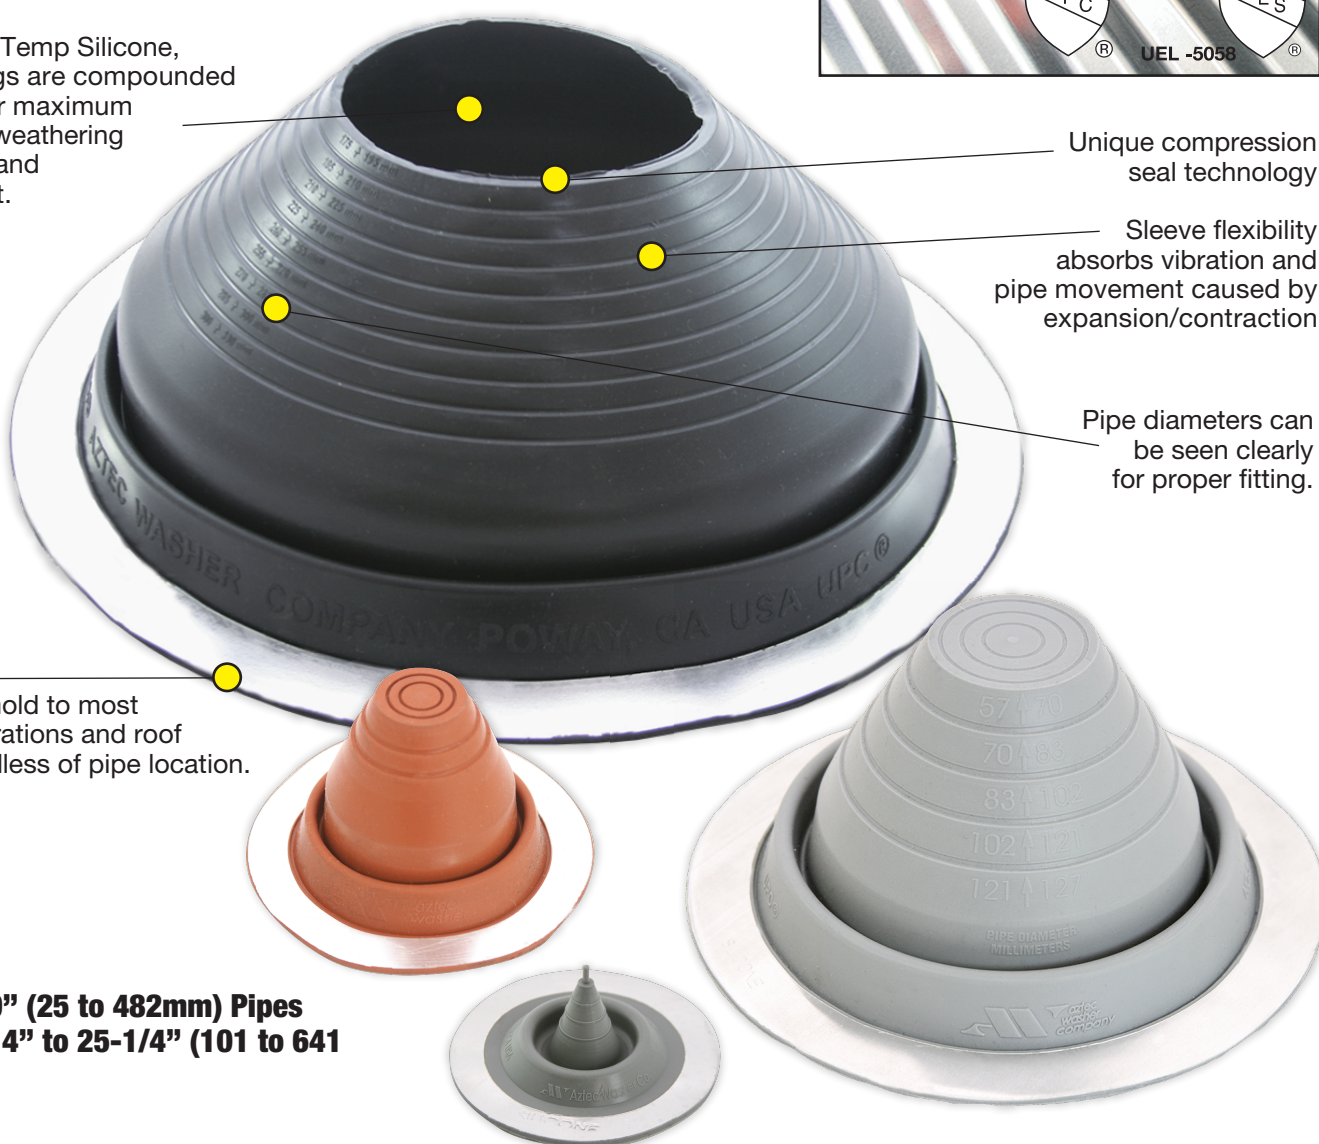

Fits: 1" to 19" (25 to 482mm) Pipes
Base Range: 4" to 25-1/4" (101 to 641)



Master Flash® was used to create a new engineering standard for profiled roofing by the International Association of Plumbing and Mechanical Officials (for the Uniform Plumbing Code) and remains the only product listed. These products are also listed for use with Type B vents.

The addition of fire retarding agents milled directly into the rubber compound created a self extinguishing feature which enables it to be used with type "B" vents. Listed with IAPMO certification No. 3121